


THE INNER FRAME OF THE DOOR IS MADE OF PROFILE WITH A THICKNESS OF 2 MM

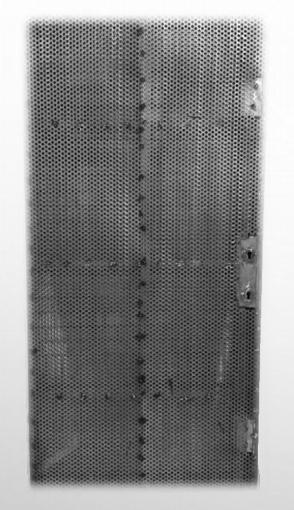

Injection of polyurethane foam inside the door for long-term insulation and heat and cold insulation

Internal structure of 20 x 20 profile and punch sheet

Security Door Thermo wood Cover

0





Security Door Concrete Cover



Security Door PVC Sheet Cover





Security Door Entrance Out Door




Specifications of anti-theft doors of Kachar Industrial Group:

- MDF door cover with thicknesses of 6 mm, 8 mm and 12 mm
- Folding nose made of painted aluminum
- Installation of opening rubber for heat, sound and impact insulation
- Bent frame of sheet with a thickness of 2 mm with a floor of 12 to 18 cm
- The inner structure of the door is made of profile with a thickness of 2 mm
- Ironing inside the skeleton of 20 * 20 profiles and punch sheets
- Consumable fittings from the Turkish Kale brand, two 7-tab locks and a 14-tab multisystem
- Electrostatic frame paint
- Traction knob and movable and eye handle 200 degrees
- Injection of polyurethane foam inside the door for late insulation, cold and heat insulation
- Doors with various designs and diameters of 6 cm, 7 cm and 8 cm
- Built-in place of 2 mm thick sheet to protect the locks



P

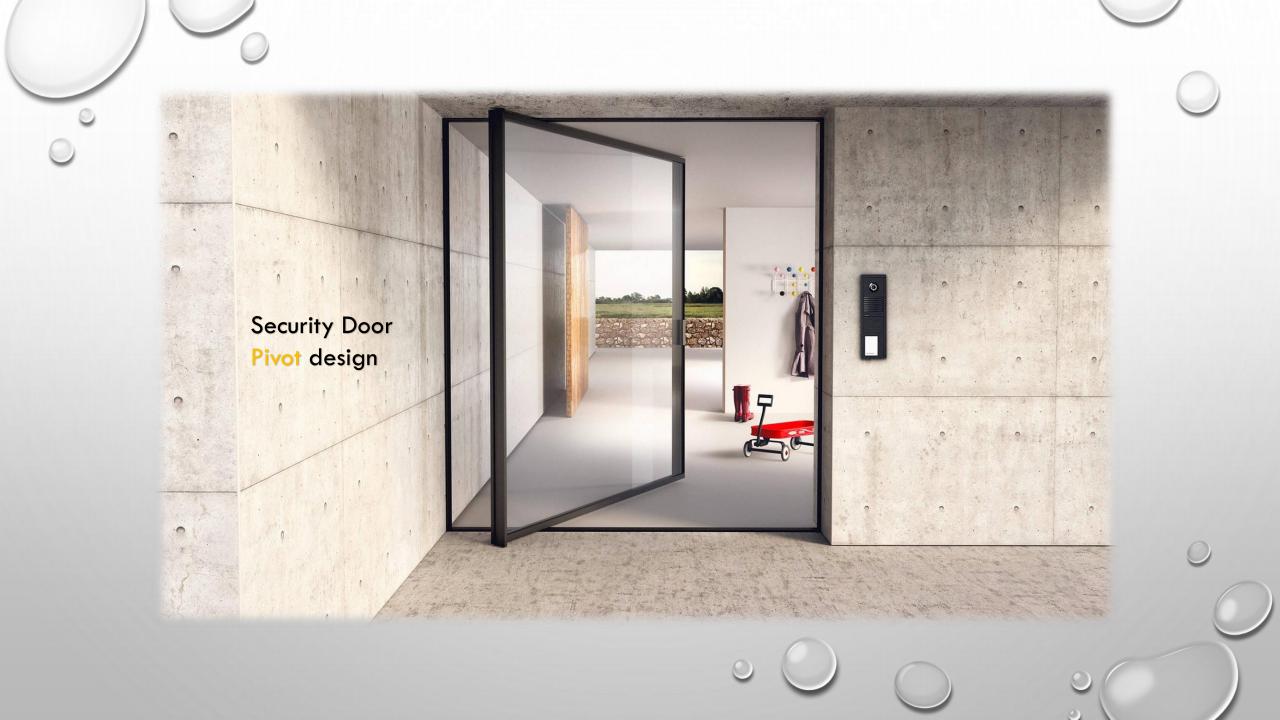





Security Door Custom dimensions

0





 \bigcirc

0

Security Door Lobby Door







Security Door Conference hall Entrance door



Attractive & Stunning . . . !





Get in touch with us

And more than 1000 different designs ...

Get in touch with us . . .

www.kacharwin.com info@kacharwin.com 021-66611500

 \bigcirc

0